




adaptivmini

Now with dynamic parking lines

CAM-AU12-AD

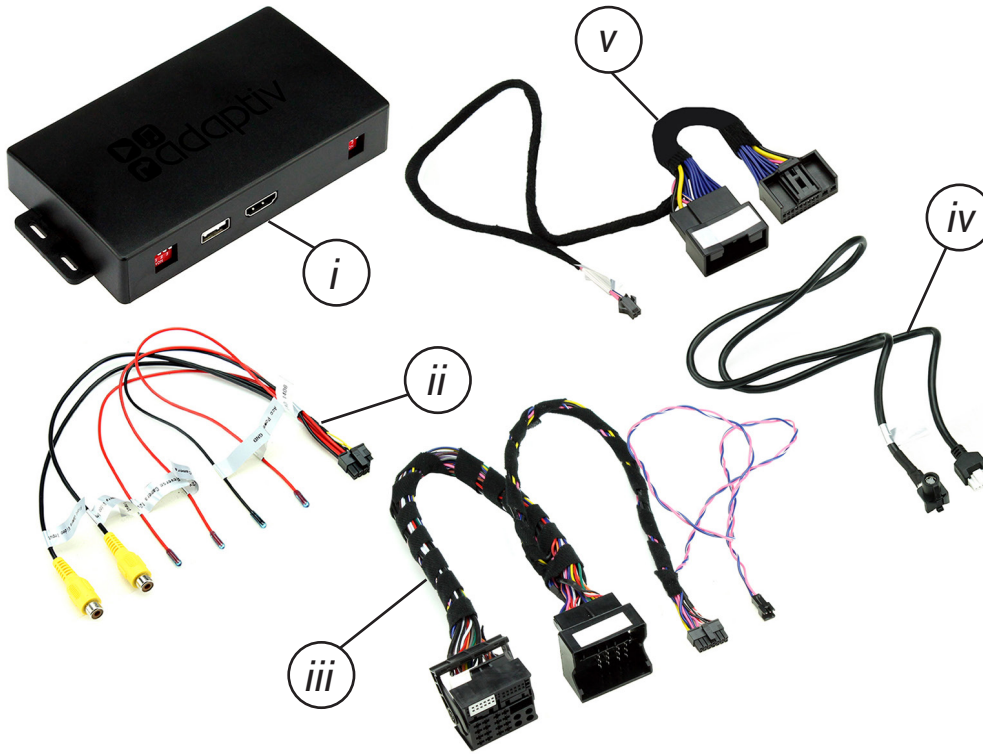

- Key
- i. Adaptiv Mini Interface
 - ii. A/V Cable
 - iii. Main Wiring Harness
 - iv. LVDS Cable
 - v. Climate Control Harness

APPLICATION

Note: Application data is subject to change at any time

Audi A5	2009 - 2017
Audi A6	2009 - 2017
Audi A8	2009 - 2017
Audi Q5	2009 - 2017
Audi Q7	2009 - 2017

For MMI Vehicles with 3 Basic 6.5" Screen, 3G/3G+ 7" Screen, & 8" Screen

FEATURES

- Provides HDMI Input
- Provides Inputs for 2x Cameras (Front/Rear)



DISCLAIMER

The information provided in this document is subject to change without notice due to manufacturer changes and/or improvements to the product/s. This instruction manual is based on documented data and research. The manufacturer of this product cannot be held responsible for any changes made to the vehicle by the manufacturer or damages that may occur through the installation of this product in accordance with the steps outlined herein.






PRIOR TO INSTALLATION

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Please ensure that the correct tools are using during the installation to avoid damage to the vehicle or product. Connects2 can not be held responsible for the installation of this product.

For further help and support, please contact us directly at support.connects2.com/tickets/technical and fill out a support ticket with the full details of your issue.

a. Setting the Dipswitches

Before installing the Adaptiv Mini interface into the vehicle, please set the dipswitches on the interface box (i.) according to the specifications as outlined below:

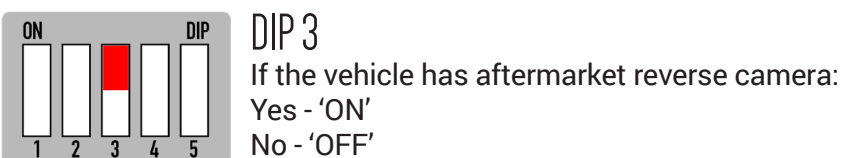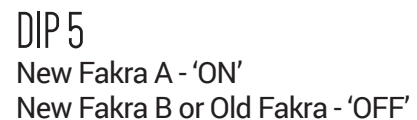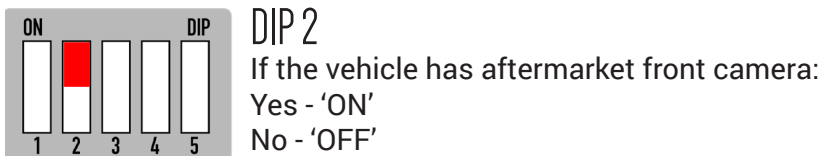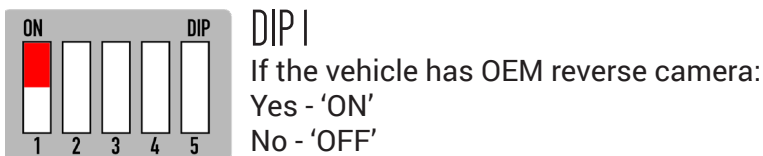

CONNECTION INFORMATION


Please note: All connections from the Adaptiv Mini interface are made to the rear of the OEM head unit, except for the climate control harness which must be connected to the rear of the OEM climate control panel.

a. Climate Control Harness


Please see Page 3 for connector images and connect the climate control harness according to the below instructions:

1. Remove Conn. D from the back of the OEM climate control panel
2. Plug Conn. D into Conn. A of the Adaptiv climate control harness
3. Plug Conn. B from the Adaptiv climate control harness into the space previously occupied by Conn. D
4. Connect Conn. C to the 2 pin connector on the Main Wiring Harness (purple/pink wire)


Climate Control Harness

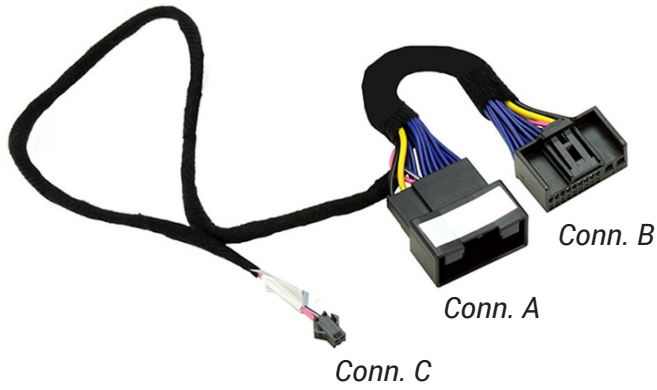

Rear of OEM Climate Control Panel

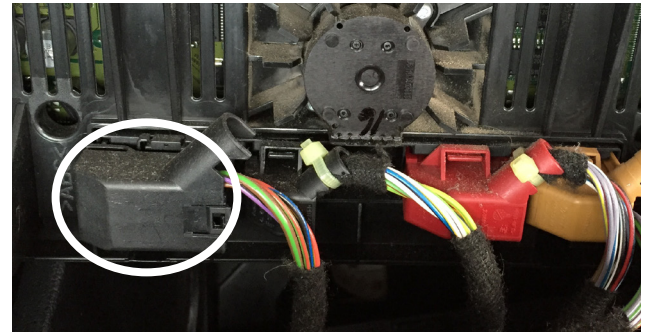

b. Main Connection Diagram

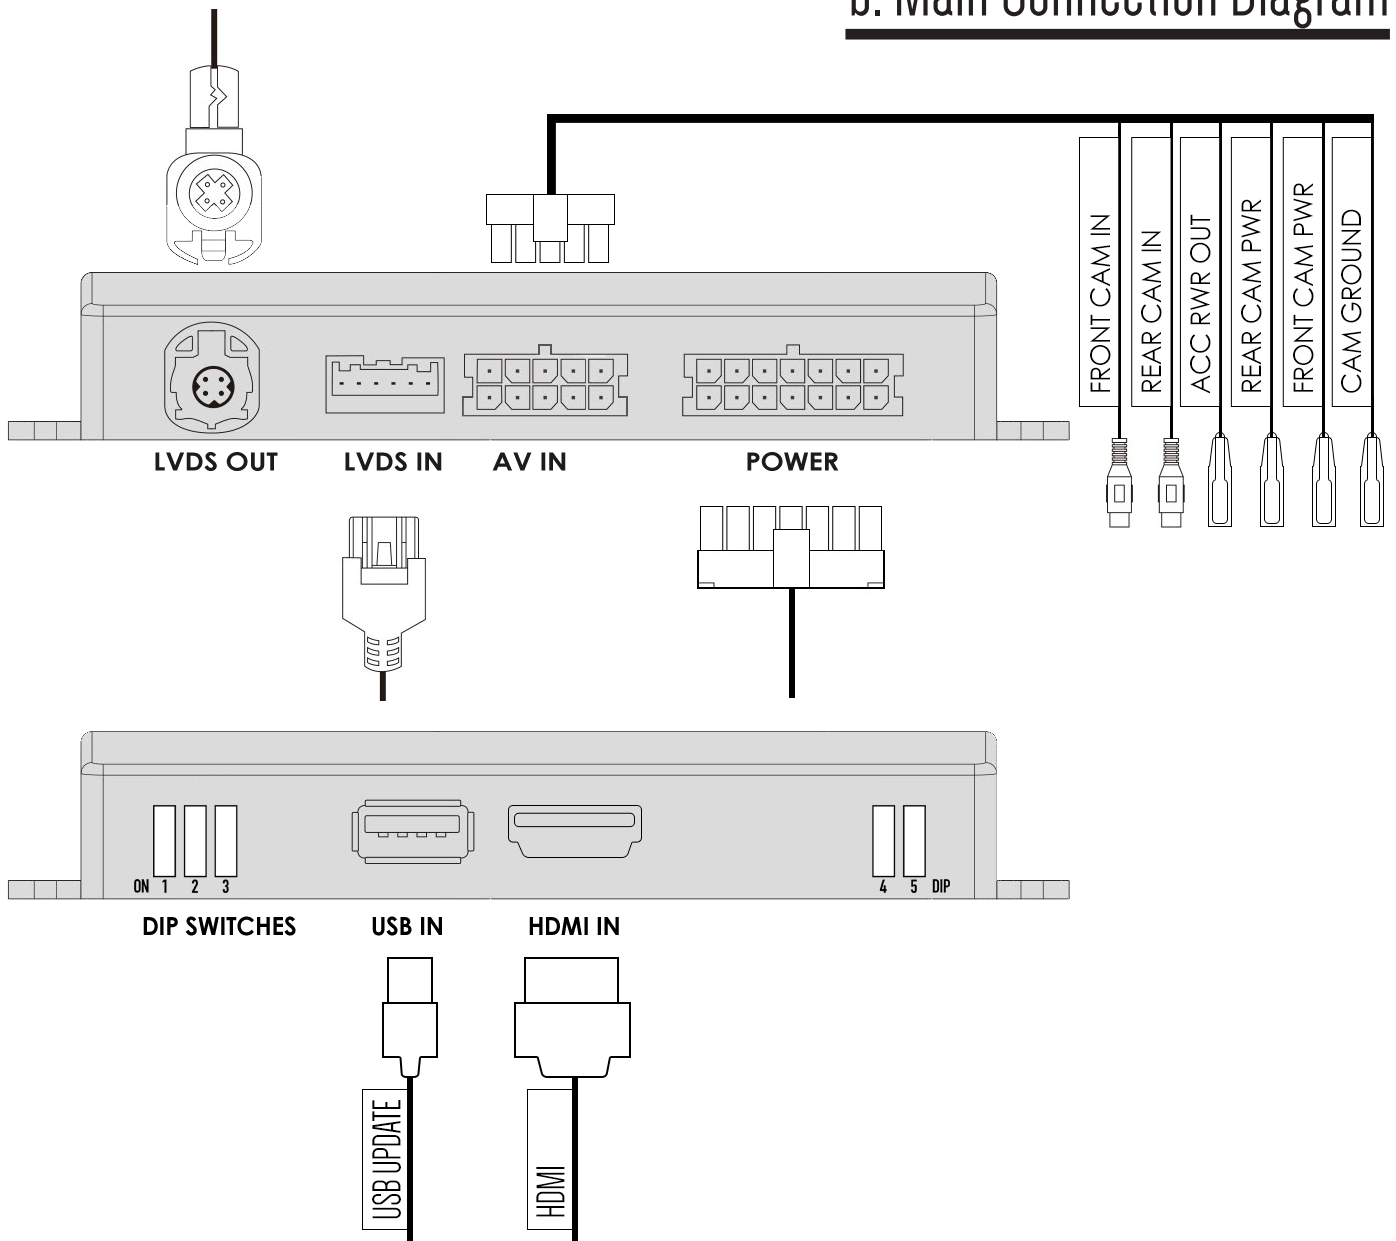

Need help? Visit support.connects2.com/tickets/technical

USING ADAPTIV MINI

a. Button Configuration



MMI Type 1 - 'Return' button



MMI Type 2 - 'Back' button

b. HDMI Access

1. Select **Aux In** from the Media source list.

Note: An AMI to 3.5mm cable must be connected to the AMI socket in order to activate the Aux input.

2. Hold 'Return' or 'Back' for 2 seconds to switch between the OEM screen and the Adaptiv Mini HDMI screen.



Note: If a video in motion warning message is displayed, double press 'Return' or 'Back' to continue

c. Front & Rear Camera Access

Note: Front and rear camera view can be accessed from either OEM or HDMI screens

1. Select reverse gear to activate OEM or aftermarket reverse camera
2. Deselecting reverse gear will activate aftermarket front camera (if DIP 2 is 'On')
3. To cancel front camera, accelerate over 10mph or double press 'Return' or 'Back'.



To access the aftermarket front camera manually (if DIP 2 is 'On'), double press 'Return' or 'Back'

d. Dynamic Parking Guidelines

Set to On by default when reversing camera image is active. To toggle off/on, press and hold the 'Return' or 'Back' button for two seconds when reversing camera image is active.

Note: To view the version number of the product and to access firmware information, hold 'Return' or 'Back' for 8 seconds