





Adaptiv Mini Fitting & User Guide

CAM-AU8-AD

WWW.ADAPTIV-MUI.TIMFDIA.COM



Adaptiv Mini

Adaptiv Mini allows HDMI and camera input to the OEM screen. Includes removable dynamic parking guidelines.



This plug and play Mini interface adds HDMI to connect your Apple or Android device, allowing you to mirror your smartphone display on the vehicle's original screen. Inputs for front and rear aftermarket cameras also come as standard with the Mini.

Application

Audi Q3 (8U) 2011 - 2018

Vehicles with 5.8" colour centre display and Concert head unit. Vehicles with OEM AUX input only

Kit Includes

Adaptiv Interface Vehicle Harness

Prior to installation

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Connects2 cannot be held responsible for the installation of this product.


Technical Support

Connects2 want to provide a fast and suitable resolution should you encounter any technical issues. With this in mind, when contacting Connects2, try to provide as much Information as possible. This will speed up the process and help us to help you.


Please use our dedicated online technical support centre: support.connects2.com

2 AUDI Q3



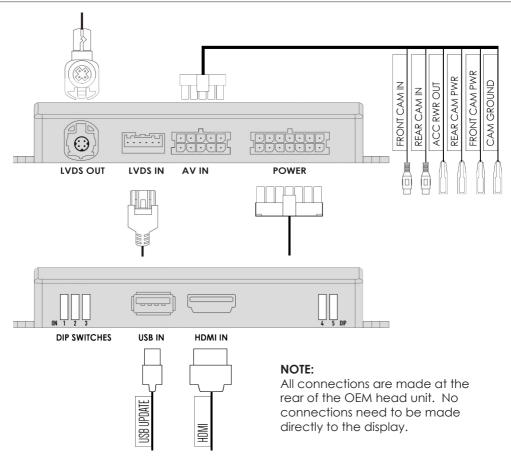


DIP SWITCH SETTINGS




DIP 1

If the vehicle has OEM reverse camera (ON: YES OFF: NO)




DIP 3

If the vehicle has aftermarket reverse camera (ON: YES OFF: NO)



DIP 2

If the vehicle has aftermarket front camera (ON: YES OFF:NO)



DIP 4

No Function

DIP 5

No Function



Button Configuration



Vehicles with steering wheel controls



Vehicles without steering wheel controls

HDMI Access

Select Aux In from the OEM source menu. Hold **BUTTON A** Button for 2 seconds to switch between OEM screen and Adaptiv Mini HDMI screen



Video In Motion Warning - 10 MPH

Hold BUTTON B to disable the video in motion warning message

Rear and Front Camera Access

From either HDMI mode or OEM mode

- 1. Select reverse gear for reverse camera
- 2. Deselect reverse gear will go to after market front camera (if DIP 2 ON)
 To cancel front camera drive over 10 MPH or hold **BUTTON B** for 2 seconds







Front Camera Access

Hold BUTTON B for 2 seconds to enter/exit the front camera screen (if DIP 2 is ON)

Dynamic Parking Guidelines

Set to On by default when reversing camera image is active. To toggle off/on, press and hold the upper wiper button (ii, BUTTON A) for two seconds when reversing camera image is active.

View Version Number

Hold **BUTTON A** Button for 8 seconds to enter firmware information screen