


NOTE: Access the interface setting menu as shown in the pictures.



The available settings are (if the related optional is equipped by the car):

- Date & Time change
- measure unit change
- doors automatic closing setting
- daily light
- DNA (current status, display only)
- The rear PARKING SENSOR will be displayed on the ALPINE radio display

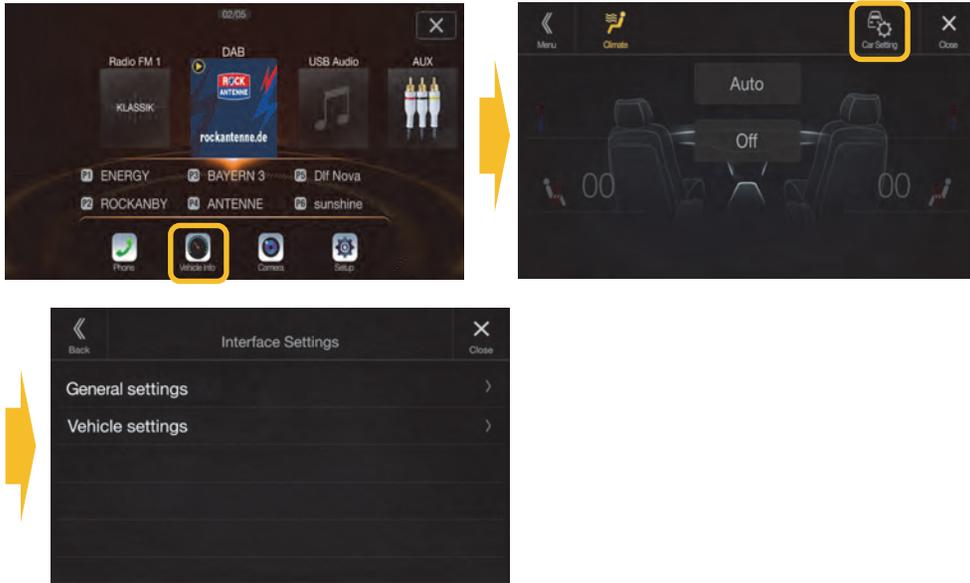

All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.
04/2023 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.


Steering wheel remote control interface installation kit for:

Alfa Romeo

Model: Giulietta (compatible with VP2 system) 2013 →
Mito (compatible with VP2 system) 2016 – 2018

Kit content: SWRC CAN bus interface with wiring harness and 52-pin connector; FM antenna adapter; USB adapter


Customer code: KIT-7AR-940

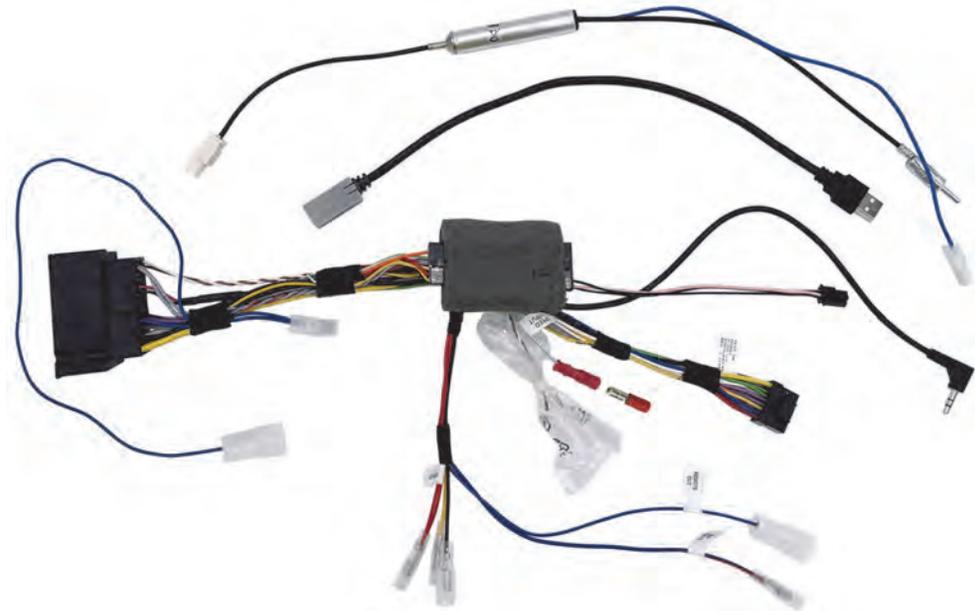

INSTALLATION MANUAL

All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.
04/2023 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.

A. Content and wiring harness connections.

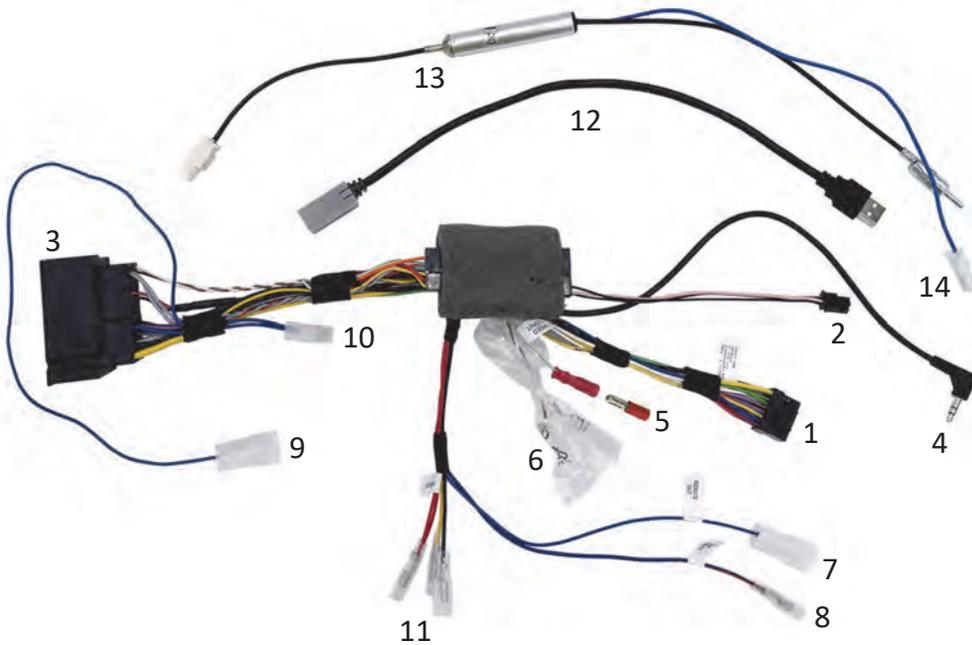

ATTENTION!
In order to prevent ESD damage, the UART Connector (2) must be connected before plugging in the connectors on car side.

- | | |
|--|--|
| 1 - to Alpine POWER connector | 9 - POWER ANTENNA output (only if Pos.7 + Pos.10 is connected) |
| 2 - to Alpine CAN I/F connector | 10 - AMP POWER IN
→ connect to Pos. 7
(Use only for amplifier Bypass) |
| 3 - to CAR connector | 11 - External power outputs
(Yellow: Battery; Red: Ignition; Black: Ground) |
| 4 - to Alpine AUX IN connector
(NOTE: do not connect to STEERING REMOTE socket) | 12 - USB plug adapter |
| 5 - Green cable – SPEED OUT
(must connect to Alpine radio) | 13 - Antenna adapter |
| 6 - Connect to Alpine radio's Camera Direct input connector
(if original camera is available) | 14 - POWER ANTENNA input
→ connect to Pos.7/9 |
| 7 - OWER ANTENNA output (+12V) | |
| 8 - AMP REMOTE output (+12V) | |

B. Steering wheel remote control functions.

The steering wheel remote control buttons perform the following functions (if supported by the radio / vehicle):



- | | | |
|------------|------------------------|------------------------|
| 1 Mute | 4 Volume – | 7 Seek – |
| 2 Volume + | 5 Seek + | 8 Reject incoming call |
| 3 Voice | 6 Accept incoming call | |

If the vehicle is equipped with the system shown in picture:



The original USB socket must be replaced because it is not compatible with ALPINE monitor. USB socket compatible with ALPINE
 -> FIAT CODE: 735628336