



adaptiv*mini*

Now with dynamic parking lines



Adaptiv Mini Fitting & User Guide

CAM-FD2-AD

WWW.ADAPTIV-MULTIMEDIA.COM

Adaptiv Mini

Adaptiv Mini allows HDMI & Camera input to the OEM screen. Includes removable dynamic parking guidelines.



HDMI INPUT



**FRONT & REAR
CAMERA**

This plug and play Mini interface adds HDMI to connect your Apple or Android device, allowing you to mirror your smartphone display on the vehicle's original screen. Inputs for front and rear aftermarket cameras also come as standard with the Mini.

Application

For Ford vehicles with Sync3.2 systems and 8" display (tablet-style).

Note: Not for vehicles with standard Sync3 (not 3.2) systems or dash embedded-style displays.

Kit Includes

Adaptiv Interface
Vehicle Harness

Prior to installation




Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources.

Connects2 cannot be held responsible for the installation of this product.

Technical Support

Connects2 want to provide a fast and suitable resolution should you encounter any technical issues. With this in mind, when contacting Connects2, try to provide as much Information as possible. This will speed up the process and help us to help you.


Please use our dedicated online technical support centre: support.connects2.com

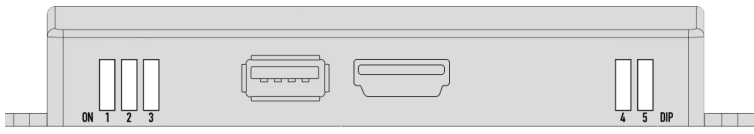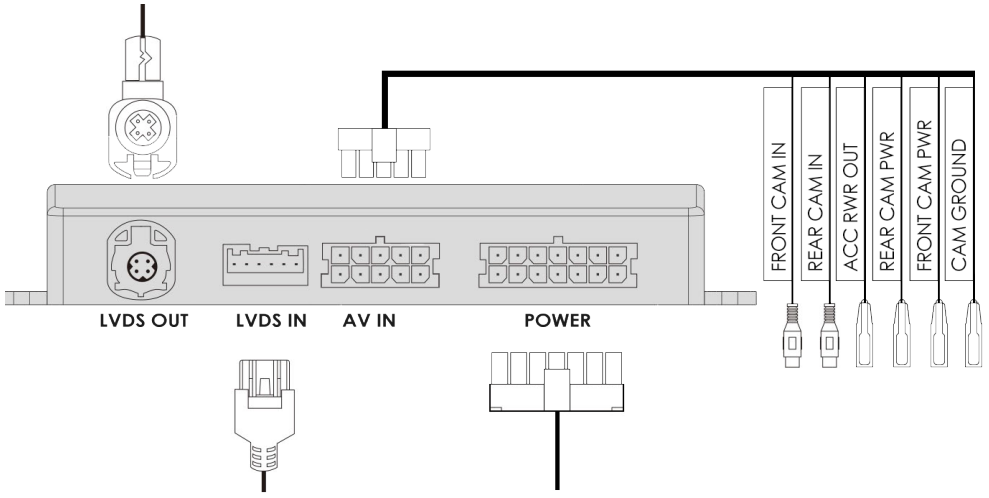


Note: LVDS connection must be made directly the vehicle's SYNC module (location will vary depending on vehicle model)

Use the included extension cable (if required) to make the connection between the SYNC module and the interface


DIP SWITCH SETTINGS




DIP 1
If the vehicle has OEM reverse camera
(ON: YES OFF: NO)




DIP 3
If the vehicle has after-market reverse camera
(ON: YES OFF: NO)



DIP 2
If the vehicle has after-market front camera
(ON: YES OFF:NO)



DIP 4
OFF
DIP 5
OFF



Button Configuration

Button 1 - Mute (Steering Wheel)

HDMI Access

Connect the USB dongle supplied to the Sync USB input**. Select USB source from the OEM menu sources. The dongle will appear as 'USB AUX'.

Double press **BUTTON 1** to switch between OEM screen and Adaptiv Mini HDMI screen



Video In Motion Warning - 10 MPH

To disable the video in motion warning message, press the upper right corner of the display

Rear and Front Camera Access

From either HDMI mode or OEM mode

1. Select reverse gear for reverse camera
2. Deselect reverse gear - will go to aftermarket front camera (if DIP 2 ON)
Press top right corner of screen to cancel front camera or drive over 10mph



Front Camera Access

To enter the front camera screen (if DIP 2 is ON), press the upper right corner of the display

View Version Number

Press **BUTTON 1** quickly four times to enter firmware information screen

**Note that there may be a slight delay in HDMI audio lip sync , due to the USB audio buffer time of the OEM system. This is dependant on manufacturer original equipment specification.